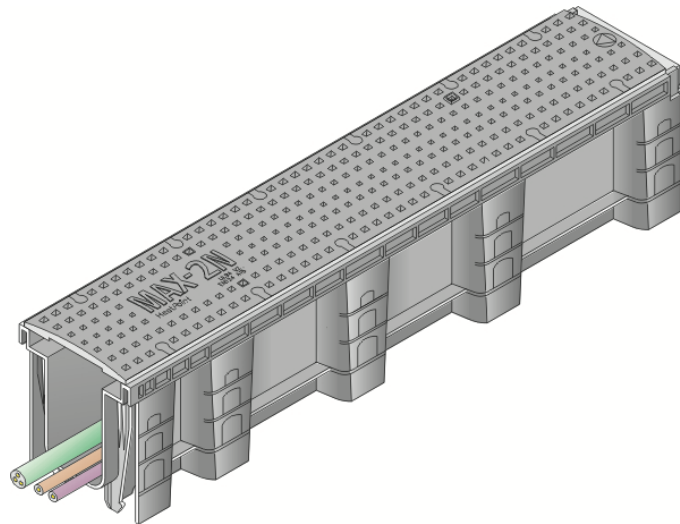
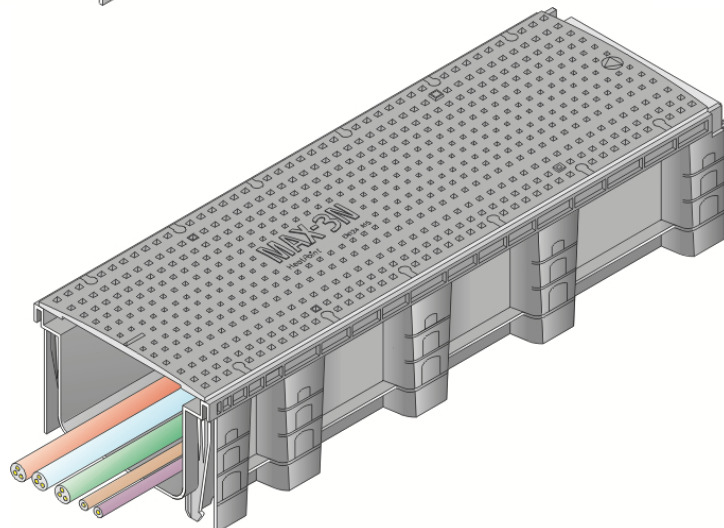


Product Catalog MAX-2N & MAX-3N Plastic Cable Ducts



HN200100



HN300100

Manufacturer and supplier:
Distributor:

Heatpoint b.v. - Netherlands

Other related documentation:











EN-H5060-ISV-MAX-N (installation manual)













Reference:











EN-H5100-MAX-N Version 1.32




Product Catalog MAX-2N & MAX-3N Plastic Cable Ducts

Pos.	Product no.	Description MAX-2N	Illustration (incl drawing no.)
1.1	H720100110	MAX-2N cable duct -dimensions external 1000x185x215 (LxWxH) mm	 HN205100
1.2	H720150110	MAX-2N lid (with 4 mounting hooks) -dimensions approx. 1000x170x35 (LxWxH) mm -text on lid <MAX-2N>	 HN205110
1.3	H720200015	MAX-2N 15° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210015L
1.4	H720300015	MAX-2N 15° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210015R
1.5	H720200030	MAX-2N 30° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210030L
1.6	H720300030	MAX-2N 30° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 N210030R
1.7	H720200045	MAX-2N 45° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210045L
1.8	H720300045	MAX-2N 45° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210045R
1.9	H720200090	MAX-2N 90° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210090L
1.10	H720300090	MAX-2N 90° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210090R
1.11	H720202090	MAX-2N T-piece 90° - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210390L
1.12	H720302090	MAX-2N T-piece 90° - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210390R

1.13	H720201090	MAX-2N 90° corner element - LEFT WITH RADIUS in laying direction (hor.) -incl. duct, lid (3 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 487mm/538mm (see manual EN-H5060) -all pre-assembled	 HN210290L
1.14	H720301090	MAX-2N 90° corner element - RIGHT WITH RADIUS in laying direction (hor.) -incl. duct, lid (3 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 487mm/538mm (see manual EN-H5060) -all pre-assembled	 HN210290R
1.15	H720202090	MAX-2N T-piece 90° - LEFT WITH RADIUS in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 200mm/300mm (see manual EN-H5060) -all pre-assembled	 HN210490L
1.16	H720302090	MAX-2N T-piece 90° - RIGHT WITH RADIUS in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 200mm/300mm (see manual EN-H5060) -all pre-assembled	 HN210490R
1.17	H720400015	MAX-2N 15° - UNIVERSAL in laying direction (vertical) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210115
1.18	H720400030	MAX-2N 30° - UNIVERSAL in laying direction (vertical) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN210130
1.19	H720900100	MAX-2N - end plate trapezoid (female side cable duct) -incl. 2 fixation screws 8x50mm (stainless steel) -thickness 10mm	 HN250100
1.20	H720900110	MAX-2N - end plate rectangular (male side cable duct) -incl. 2 separate fixation screws 8x50mm (stainless steel) -thickness 5mm	 HN250200
1.21	H810200600	MAX-2N transition plate UNIVERSAL from MAX-2N <-> MAX-3N (both ways) -incl. 4 fixation screws 8x50mm (stainless steel) -thickness 5mm	 HN250300
1.22	H810100090	MAX-2N coupling set (3 parts) to shorten MAX-2N (see manual EN-H5060) -incl. 24 fasteners (20mm) and 4 fixation screws 8x50mm (stainless steel)	 H331200

Pos.	Product no.	Description MAX-3N	Illustration (incl drawing no.)
2.1	H730100120	MAX-3N cable duct -dimensions external 1000x325x215 (LxWxH) mm	 HN305100
2.2	H730150120	MAX-3N lid (with 5 mounting hooks) -dimensions approx. 1000x330x35 (LxWxH) mm -text on lid <MAX-3N>	 HN305110
2.3	H730200015	MAX-3N 15° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310015L
2.4	H730300015	MAX-3N 15° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310015R
2.5	H730200030	MAX-3N 30° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310030L
2.6	H730300030	MAX-3N 30° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310030R
2.7	H730200045	MAX-3N 45° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310045L
2.8	H730300045	MAX-3N 45° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310045R
2.9	H730200090	MAX-3N 90° corner element - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310090L
2.10	H730300090	MAX-3N 90° corner element - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310090R
2.11	H730202090	MAX-3N T-piece 90° - LEFT in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310390L
2.12	H730302090	MAX-3N T-piece 90° - RIGHT in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -all pre-assembled	 HN310390R

2.13	H730201090	MAX-3N 90° corner element - LEFT WITH RADIUS in laying direction (hor.) -incl. duct, lid (3 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 487mm/538mm (see manual EN-H5060) -all pre-assembled	 <p>HN310390R</p> <p>HN310290L</p>
2.14	H730301090	MAX-3N 90° corner element - RIGHT WITH RADIUS in laying direction (hor.) -incl. duct, lid (3 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 487mm/538mm (see manual EN-H5060) -all pre-assembled	 <p>HN310290R</p> <p>HN310490L</p>
2.15	H730202190	MAX-3N T-piece 90° - LEFT WITH RADIUS in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 200mm/300mm (see manual EN-H5060) -all pre-assembled	 <p>HN310490L</p>
2.16	H730302190	MAX-3N T-piece 90° - RIGHT WITH RADIUS in laying direction (horizontal) -incl. duct, lid (2 parts) and 6 fixation screws 8x50mm (stainless steel) -internal/external cable radius 200mm/300mm (see manual EN-H5060) -all pre-assembled	 <p>HN310490R</p>
2.17	H730400015	MAX-3N 15° - UNIVERSAL in laying direction (vertical) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 <p>HN310115</p>
2.18	H730400030	MAX-3N 30° - UNIVERSAL in laying direction (vertical) -incl. duct, lid (2 parts) and 4 fixation screws 8x50mm (stainless steel) -all pre-assembled	 <p>HN310130</p>
2.19	H730900100	MAX-3N - end plate trapezoid (female side cable duct) -incl. 2 fixation screws 8x50mm (stainless steel) -thickness 10mm	 <p>HN350100</p>
2.20	H730900110	MAX-3N - end plate rectangular (male side cable duct) -incl. 2 separate fixation screws 8x50mm (stainless steel) -thickness 5mm	 <p>HN350200</p>
2.21	H730900150	MAX-3N transition plate UNIVERSAL from MAX-3N <-> MAX-2N (both ways) -incl. 4 fixation screws 8x50mm (stainless steel) -thickness 5mm	 <p>HN350300</p>
2.22	H810100100	MAX-3N coupling set (3 parts) to shorten MAX-3N (see manual EN-H5060) -incl. 24 fasteners (20mm) and 4 fixation screws 8x50mm (stainless steel)	 <p>H331200</p>

Pos.	Product no.	Description <u>MAX-2N & MAX-3N</u>	Illustration (incl drawing no.)
3.1	H810901250	Torx screws (per 100 units) to secure lid (optional)	 <small>H101550</small>
3.2	H810050150	Fastener 20mm (per 100 units) to fix coupling set (optional)	 <small>H321016</small>
3.3	H750100100	T-wrench incl. lifting tool for fitting and removing lid.	 <small>HN410100 / 120</small>